


# V655 CHRONOGRAPH

## CHARACTERISTICS

1. Time: Indicated by the hour, minute and second hands.
2. Stopwatch: Measures up to 60 minutes with 1/10 second readout. Split time measurement is also possible.

## DISPLAY AND CROWN & BUTTON OPERATION

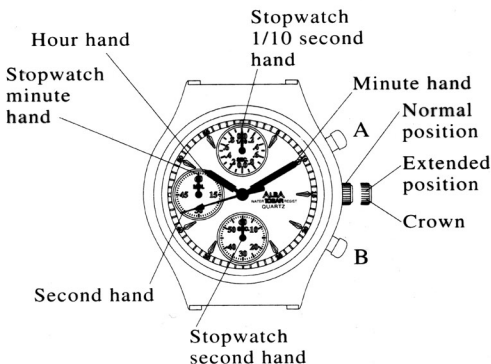

### Crown

Normal position : Free

Extended position : • Setting the hour and minute hands.  
• Activating the stopwatch hand position adjusting function.

Button A : • Start/Stop in the stopwatch function.  
• Turning the stopwatch 1/10 second hand clockwise in the stopwatch hand position adjusting function.

Button B : • Split/Split release/Reset in the stopwatch function.  
• Turning the stopwatch minute and second hands clockwise in the stopwatch hand position adjusting function.


## ADJUSTING THE STOPWATCH HAND POSITION

Before setting the time, be sure to check if the stopwatch minute, second and 1/10 second hands are in the "0" position.

\*If the stopwatch is in use, depress the buttons in the following order to reset it, and then check if the hands return to "0" position. (See "HOW TO USE THE STOPWATCH".)


- If the stopwatch is counting : "A"→"B"
- If the stopwatch is stopped : "B"
- If the split time is displayed : "B"→"A"→"B"

\* If any of the stopwatch hands are not in the "0" position, reset them following the procedure below.

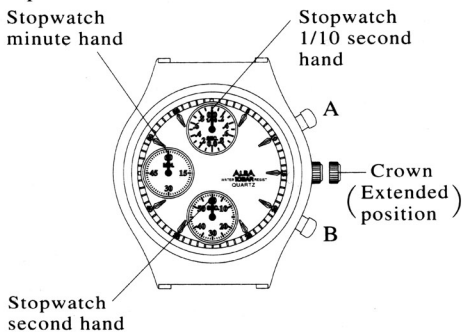

1. Pull out the crown.
2. Depress button "A" repeatedly to reset the stopwatch 1/10 second hand to "0" position.  
\* The hand moves quickly if the button is kept depressed.
3. Depress button "B" repeatedly to reset the stopwatch minute and second hands to "0" position.  
\* The stopwatch minute hand moves correspondingly with the stopwatch second hand.  
\* The hands move quickly if the button is kept depressed.
4. Push the crown back in to the normal position.

## HOW TO SET THE TIME

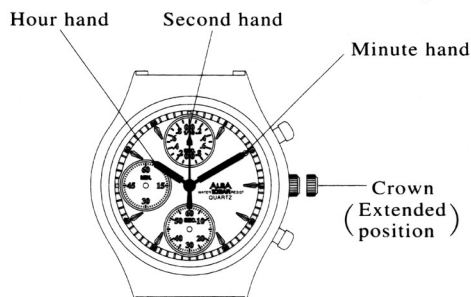

1. Pull out the crown when the second hand is at the 12 o'clock position. The second hand will stop on the spot.

\* While the crown is at the extended position, do not depress any button. Otherwise, the stopwatch hands will move. (For details, see "ADJUSTING THE STOPWATCH HAND POSITION".)

2. Turn the crown clockwise or counterclockwise to set the hour and minute hands to the desired time.


\* When setting the minute hand, first advance it 4 to 5 minutes ahead of the desired time and then turn it back to the exact minute.

3. Push the crown back in to the normal position in accordance with a time signal.

## HOW TO USE THE STOPWATCH

The stopwatch can measure up to 60 minutes in 1/10 seconds.

The measured time is indicated by the three small stopwatch hands that move independently of the center hands.

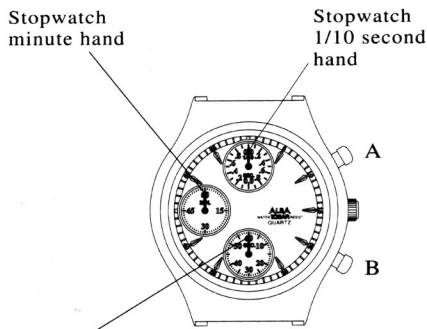


### [Movement of the stopwatch 1/10 second hand during measurement]


For the first 1 minute, the 1/10 second hand turns to show the lapse of 1/10 seconds.

After the first 1 minute, the 1/10 second hand stays at "0" position while the stopwatch is counting. When the measurement is stopped or split time is measured, it indicates the 1/10 seconds measured. When the measurement is restarted or split time is released, it returns to the "0" position.

#### Standard measurement




#### Accumulated elapsed time measurement

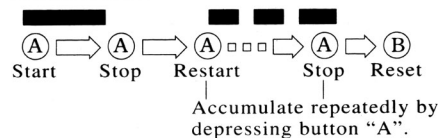

Accumulate repeatedly by depressing button "A".

#### Split time measurement



Can repeat by depressing button "B".

1. Pull out the crown.
2. Keep buttons "A" and "B" depressed at the same time for 2 seconds. When the buttons are released, the stopwatch second hand moves back and returns to where it was while the stopwatch 1/10 second hand makes a full turn.
3. Depress button "A" repeatedly to reset the stopwatch 1/10 second hand to "0" position.  
\*The hand moves quickly if the button is kept depressed.
4. Depress button "B" repeatedly to reset the stopwatch minute and second hands to "0" position.  
\*The stopwatch minute hand moves correspondingly with the stopwatch second hand.  
\*The hands move quickly if the button is kept depressed.
5. Turn the crown to set the hour and minute hands to the desired time, and push the crown back into the normal position. (Refer to "HOW TO SET THE TIME".)