


ALBA

INSTRUCTION BOOKLET CAL. 7T92

■ CHARACTERISTICS

- Time:** Indicated by the hour, minute and small second hands.
- Date:** Displayed in numerals.
- Stopwatch:** Measures up to 12 hours in 1/20 second increments.
 - Split time measurement

■ DISPLAY AND CROWN OPERATION

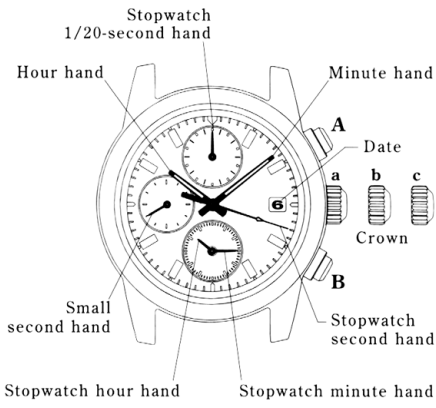


Crown

- Normal position: Free
- First click : Date setting
- Second click :
 - Time setting
 - Adjusting the stopwatch hand position

■ SETTING THE TIME AND ADJUSTING THE STOPWATCH HAND POSITION

- This watch is so designed that
 - 1) time setting and
 - 2) stopwatch hand position adjustment
 are both made with the crown at the second click position. Once the crown is pulled out to the second click, be sure to make the above adjustments at the same time.

1) Time setting

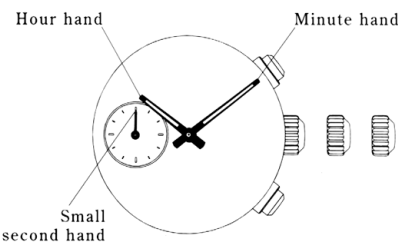


- Pull out the crown to the second click when the small second hand is at the 12 o'clock position.
 - * If the stopwatch is measuring or stopped, it is automatically reset to "0".
- Turn the crown to set the hour and minute hands.
 - * It is recommended that the hands be set to the time a few minutes ahead of the current time, taking into consideration the time required to adjust the stopwatch hand position if necessary.

Notes:


- When setting the hour hand, be sure to check that AM/PM is correctly set. The watch is so designed that the date changes once in 24 hours.
- When setting the minute hand, first advance it 4 to 5 minutes ahead of the desired time and then turn it back to the exact minute.

2) Stopwatch hand position adjustment

- If the stopwatch hands are not in the "0" position, follow the procedure below to set them to the "0" position.

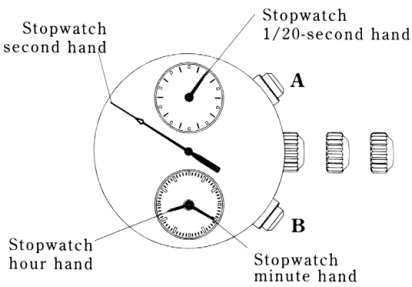

- Press button "A" for 2 seconds to select the stopwatch hand(s) to be adjusted. The selection of the hand(s) to be adjusted is made in the following order by pressing button "A" for 2 seconds.



- The selected hand(s) turn(s) a full circle.
- Press button "B" repeatedly to set the selected stopwatch hand(s) to the "0" position.
 - * The hand moves quickly if button "B" is kept pressed.
- After all the adjustments are completed, push the crown back in to the normal position in accordance with a time signal, checking that the hour and minute hands for time display indicate the current time.

■ BATTERY CHANGE

The miniature battery SEIKO SR927SW, Maxell SR927SW, SONY SR927SW or EVEREADY 395, which powers your watch should last approximately 3 years. However, because it is inserted at the factory, the actual life of the battery once in your possession may be less than the specified period.


Be sure to replace the battery to prevent any possible malfunction as soon as it runs down. To replace the battery, we recommend taking the watch to a local watch repair shop.

Notes:

- If the stopwatch is used for more than 3 hours a day, the battery life may be less than the specified period.
- After the battery is replaced with a new one, set the time/calendar and adjust the stopwatch hand position.

■ SETTING THE DATE

- Before setting the date, be sure to set the time.
- It is necessary to adjust the date at the end of February and 30-day months.




- Pull out the crown to the first click.
- Turn the crown clockwise until the desired date appears.
- Push the crown back in to the normal position.

Note: Do not set the date between 9:00 p.m. and 1:00 a.m. Otherwise, the date may not change properly.

■ STOPWATCH

- The stopwatch can measure up to 12 hours in 1/20 second increments.
- The measured time is indicated by the four stopwatch hands that move independently of the hands for time display.
- When the measurement reaches 12 hours, the stopwatch automatically stops counting.

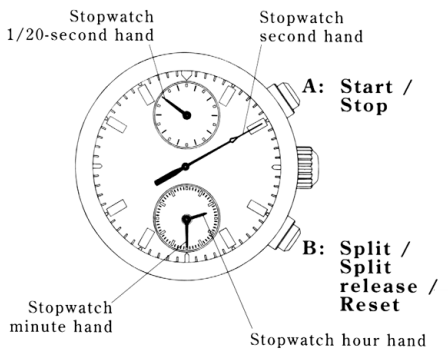

[Ex.: 2 hours, 30 minutes and 10.85 seconds]

Movement of the stopwatch 1/20-second hand


- After the stopwatch is started, the stopwatch 1/20-second hand moves for about 10 minutes and automatically stops at the "0" position.
- When the measurement is stopped or split time is measured, it moves to indicate the elapsed 1/20 seconds.
- After the measurement is restarted or split time is released, the stopwatch 1/20-second hand moves for about 10 minutes and stops automatically.
- In the same manner, if the stopwatch is stopped and restarted repeatedly or split time is measured and released repeatedly, the stopwatch 1/20-second hand moves for about 10 minutes and stops automatically.

☆ Before using the stopwatch, be sure to check that the crown is set at the normal position and that the stopwatch hands are reset to the "0" position.


* If the hands do not return to the "0" position, follow the procedure in "■ SETTING THE TIME AND ADJUSTING THE STOPWATCH HAND POSITION".

Stopwatch operation

Standard measurement




Accumulated elapsed time measurement




* Restart and stop of stopwatch can be repeated by pressing button "A".

Split time measurement



* Measurement and release of split time can be repeated by pressing button "B".

Measurement of two competitors

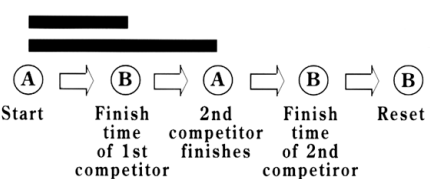

Battery life indicator

- When the battery nears its end, the small second hand moves at two-second intervals instead of normal one-second intervals. In that case, have the battery replaced with a new one as soon as possible.
- The watch remains accurate, however, while the small second hand is moving at two-second intervals.